


# Female Header 2,00 mm

Series

156

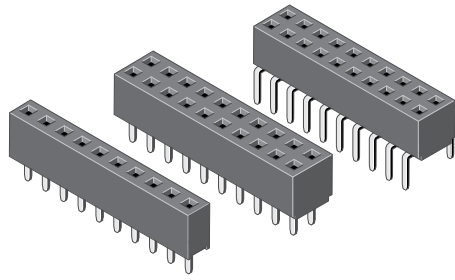

Rated current	1,5 A
Rated voltage	150 V <sub>RMS</sub> / V <sub>DC</sub>
Withstand voltage	500 V <sub>RMS</sub> for one minute
Material contact	Phosphor bronze
Material insulator	High temp. thermoplast UL94V-0
Operating temperature	-40°C to +105°C
Max. processing temper.	260°C for 10 seconds


pitch	2,00
termination	
mating pin size	<input type="checkbox"/> 0,50
max. pincount	030/040/080

All dimensions in mm.



## Variation

## PCB Layout



Product group  
4

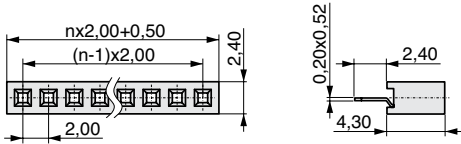



1

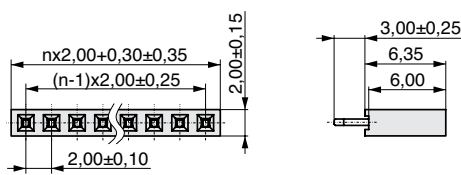



2

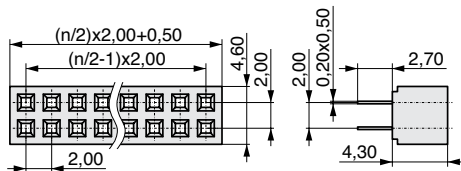



3

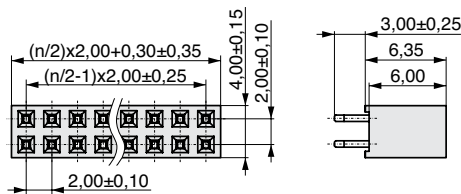


4

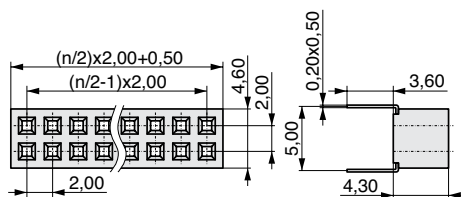

5

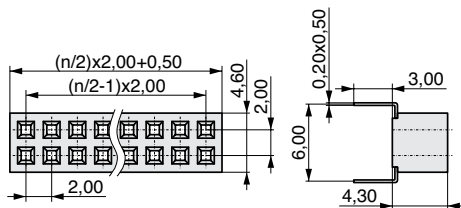

6



* No. of contacts:	Plating:
Variation 1 = 002 - 040	T = Sn
Variation 2 = 002 - 030	F = Au
Variation 3 = 006 - 080	S = Sel. Au
Variation 4 = 004 - 060	
Variation 5 = 004 - 080	
Variation 6 = 004 - 080	

Variation (1,2,3,...)

No. of contacts \*  
(002,... - 080)

Plating contact (T,F,S)



www.mpe-connector.de

Order code:

156-?-?-??-0-N?X-YS0

Mating series	150	152	151	337	332	333	155												
see page	3-25	3-26	3-27	3-28	3-29	3-30	3-33												

MPE-Garry GmbH • Schäßlerstraße 13 • 87629 Füssen • Germany • Phone: +49 (0) 83 62 / 91 56-0 • Fax: +49 (0) 83 62 / 91 56-500 • Email: vk@mpe-connector.de • www.mpe-connector.de