


Female Header SMD 1,00 mm

Series

306





Rated current	1,0 A
Rated voltage	100 V _{RMS} / V _{DC}
Withstand voltage	250 V _{RMS} for one minute
Material contact	Phosphor bronze
Material insulator	High temp. thermoplast UL94V-0
Operating temperature	-40°C to +105°C
Max. processing temper.	260°C for 10 seconds

pitch	1,00
termination	
mating pin size	<input type="checkbox"/> 0,30
max. pincount	080

All dimensions in mm.

Variation

PCB Layout

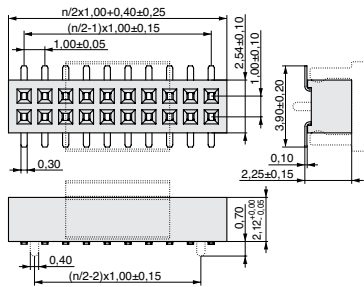

1

Positioning peg:
 0 = Without peg
 1 = With peg

Plating:
 T = Sn
 F = Au

Packaging:
 R = Reel
 T = Tube

Cap:
 0 = Without cap
 1 = With cap

Variation

No. of contacts
(010,... - 080)

Positioning peg (0,1)

Plating contact (T,F)

Packaging (R,T)

Cap (0,1)



www.mpe-connector.de

Order code:

306-1-???-?-N?X-R??

Mating series	351	359	353	355	354
see page	3-4	3-5	3-6	3-7	3-8