


# Pin Header Right Angled 2,00 mm

Series **332**

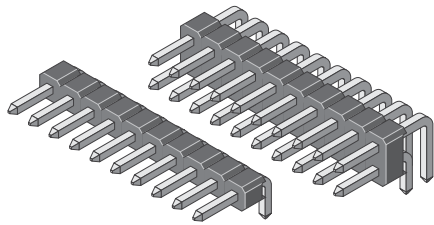


Rated current	1,5 A
Rated voltage	150 V <sub>RMS</sub> / V <sub>DC</sub>
Withstand voltage	500 V <sub>RMS</sub> for one minute
Material contact	Copper alloy
Material insulator	High temp. thermoplast UL94V-0
Operating temperature	-40°C to +105°C
Max. processing temper.	260°C for 10 seconds

pitch	<b>2,00</b>
termination	
contact size	<b>0,50</b>
max. pincount	<b>040 / 080</b>



All dimensions in mm.

## Variation



## PCB Layout

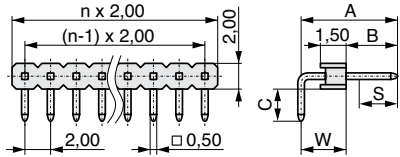



1

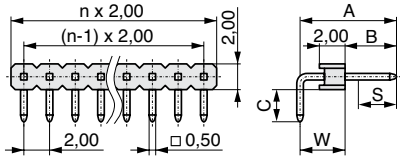


2

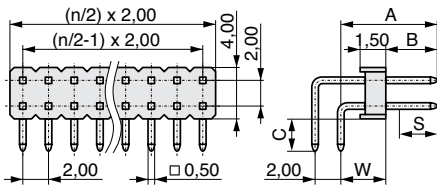

3

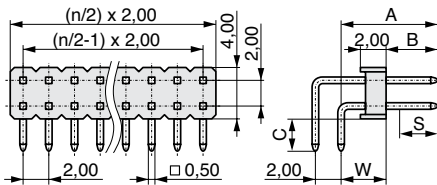

4



see figure left	see figure left	see figure left	see figure left	available in variation	
A	B	C	W	1	3
5,65	3,80	2,50	1,85	1	3
7,13	4,00	2,45	3,13	1	3
7,00	4,00	2,50	3,00	1	3
7,02	4,00	2,85	3,02	1	3
7,13	4,00	2,45	3,13	2	4
7,00	4,00	2,50	3,00	2	4
7,02	4,00	2,85	3,02	2	4

Plating:  
 T = Sn  
 F = Au  
 S = Selective Au (min 5 mm on mating side)

\* No. of contacts:  
 Variation 1 = 002 - 040  
 Variation 2 = 002 - 040  
 Variation 3 = 004 - 080  
 Variation 4 = 004 - 080

Variation (1,2,3,4)

No. of contacts \*  
(002,... - 080)

Plating contact (T,F,S)

A (1/100 mm)  
e.g. 1000 = 10,00 mm



www.mpe-connector.de

Order code: **332 - 2 - 002 - 0 - 0 - X S 0 - 002**

Mating series	156	159	422	158	413	160
see page	4-14	4-15	4-16	4-17	4-18	6-8

Product group **3**