


Pin Header Sandwich 1,00 mm

Series **359**

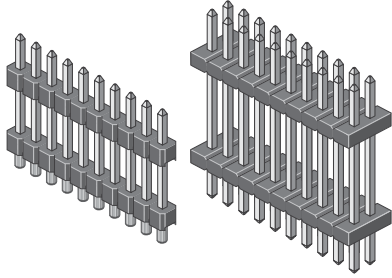


Rated current	1,0 A
Rated voltage	100 V _{RMS} / V _{DC}
Withstand voltage	250 V _{RMS} for one minute
Material contact	Copper alloy
Material insulator	High temp. thermoplast UL94V-0
Operating temperature	-40°C to +105°C
Max. processing temper.	260°C for 10 seconds

pitch	1,00
termination	
contact size	<input type="checkbox"/> 0,30
max. pincount	050 / 100


All dimensions in mm.

Product group **3**

Variation


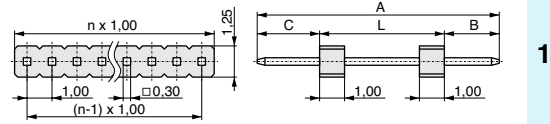


1

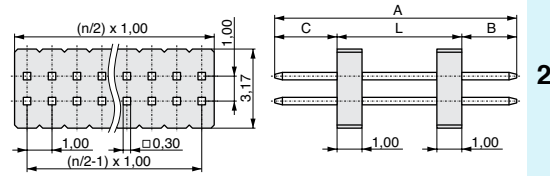

2

PCB Layout



see figure left	see figure left	see figure left	see figure left	available in variation
A	B	C	L	1 2
21,30	7,00	7,80	6,50	1 2

Plating: T = Sn, F = Au
 Packaging: S = Standard

* No. of contacts:
 Variation 1 = 001 - 050
 Variation 2 = 002 - 100

Variation (1,2)

No. of contacts * (001... - 100)

Plating contact (T,F)

Packaging

A (1/100 mm)
 e.g. 1000 = 10,00 mm



www.mpe-connector.de

Order code: **359 - 2 - 001 - 0 - 2 - X S 0 - 001**

Mating series	306																		
see page	4-4																		