


Female Header Micro Match 1,27 mm

Series

369

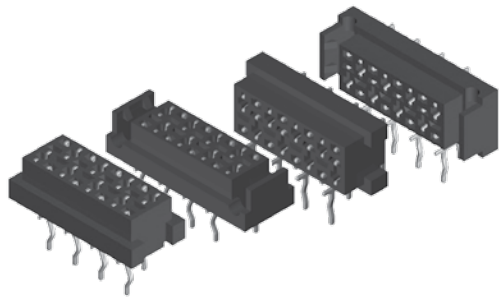

Rated current	1,0 A
Rated voltage	230 V _{RMS} / V _{DC}
Withstand voltage	500 V _{RMS} for one minute
Material contact	Phosphor bronze
Material insulator	High temp. thermoplast UL94V-0
Operating temperature	-40°C to +125°C
Max. processing temper.	260°C for 10 seconds

All dimensions in mm.


pitch
1,27

termination




max.
pincount
026

Variation

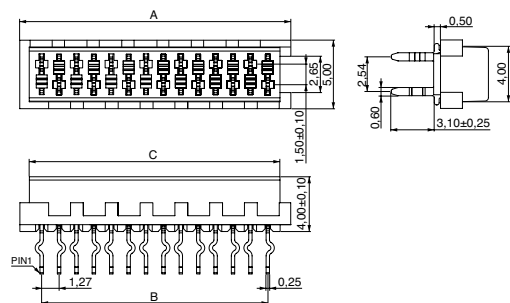


1

With locking feature

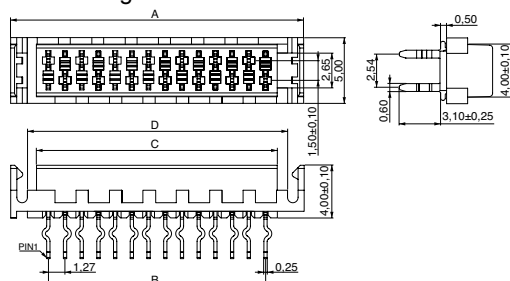


2

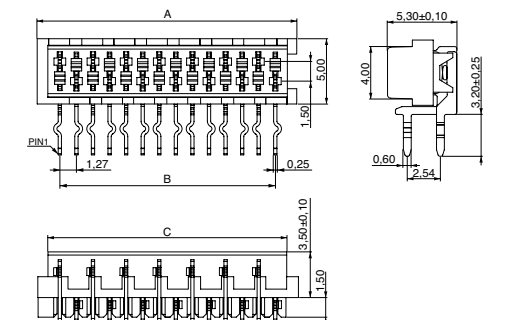

3

With locking feature




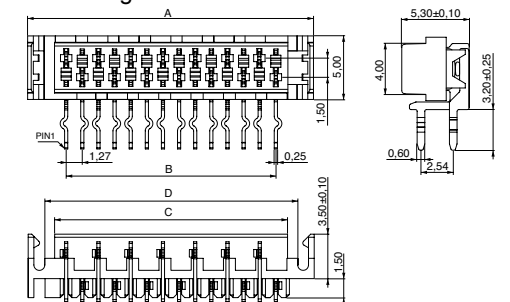


4

Plating:
T = Sn

Packaging:
R = Reel
T = Tube

PCB Layout



no. of contacts	see figure left	see figure left	see figure left	see figure left	available in variation
n	A	B	C	D	
004	7,10	3,81	5,60		1 3
006	9,70	6,35	8,14		1 3
008	12,20	8,89	10,68		1 3
010	14,70	11,43	13,22		1 3
012	17,30	13,97	15,76		1 3
014	19,80	16,51	18,30		1 3
016	22,40	19,05	20,84		1 3
018	24,90	21,59	23,38		1 3
020	27,40	24,13	25,92		1 3
024	32,50	29,21	31,00		1 3
004	9,70	3,81	5,60	7,10	2 4
006	12,20	6,35	8,14	9,70	2 4
008	14,70	8,89	10,68	12,20	2 4
010	17,30	11,43	13,22	14,70	2 4
012	19,80	13,97	15,76	17,30	2 4
014	22,40	16,51	18,30	19,80	2 4
016	24,90	19,05	20,84	22,40	2 4
018	27,40	21,59	23,38	24,90	2 4
020	30,00	24,13	25,92	27,40	2 4
024	35,10	29,21	31,00	32,50	2 4

Variation (1,2,3,4)

No. of contacts

Plating contact

Packaging (R, T)

mpe
GARRY

www.mpe-connector.de

Order code:

369-?-?-?-?-0-NTX-K?0

Mating series
see page

373 372
3-19 6-5