


Micro T Pin Header 1,27 mm

Series

386

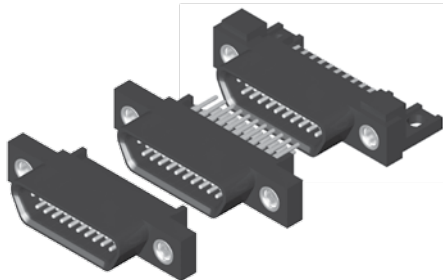

Rated current	3,0 A
Rated voltage	100 V _{RMS} / V _{DC}
Withstand voltage	500 V _{RMS} for 1 minute
Material contact	Copper alloy
Material insulator	Thermoplast UL94V-0
Operating temperature	-40°C to +105°C
Max. processing temper.	230°C for 5 seconds

All dimensions in mm.

pitch

1,27

termination



cable

termination


solder cup

max.
pincount

037


Variation

Solder cup

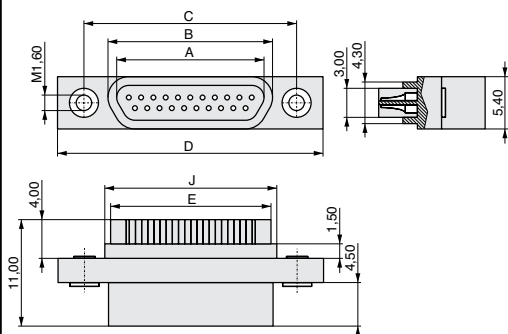


1

PCB straight

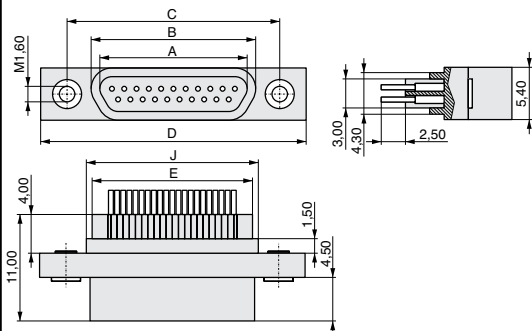



2

PCB right angled

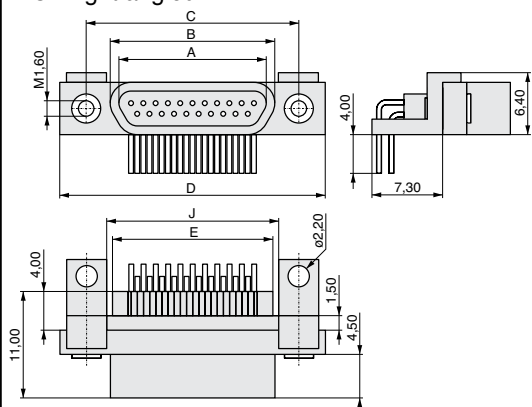

3

PCB Layout



no. of contacts

see figure left

see figure left

see figure left

see figure left

see figure left

see figure left

available in variation

n

A

B

C

D

E

J

1

2

3

009

7,62

9,52

14,35

19,81

8,95

10,15

1

2

3

015

11,43

13,33

18,16

23,62

12,76

13,96

1

2

3

021

15,24

17,14

21,97

27,43

16,57

17,77

1

2

3

025

17,78

19,68

24,51

29,97

19,11

20,31

1

2

3

031

21,59

23,49

28,32

33,78

22,92

24,12

1

2

3

037

25,40

27,30

32,13

37,59

26,73

27,93

1

2

3

Variation (1,2,3)

No. of contacts

mpe
GARRY

www.mpe-connector.de

Order code:

386-2-222-ZS0

Mating series
see page

387
11-3

MPE-Garry GmbH • Schafflerstraße 13 • 87629 Füssen • Germany • Phone: +49 (0) 83 62 / 91 56-0 • Fax: +49 (0) 83 62 / 91 56-500 • Email: vk@mpe-connector.de • www.mpe-connector.de