

# Precision Socket Strip Right Angled 2,54 mm

Series

**009**




Rated current	3,0 A
Rated voltage	150 V <sub>RMS</sub> / V <sub>dc</sub>
Withstand voltage	1000 V <sub>RMS</sub> for one minute
Material contact	Copper alloy
Material clip	BeCu
Material insulator	High temp. thermoplast UL94V-0
Operating temperature	-55°C to +125°C
Max. soldering temper.	260°C for 10 seconds

pitch	<b>2,54</b>
termination	<b>†</b>
mating pin size	∅ <b>0,40-0,56</b> □ <b>0,25x0,45</b>
max. pincount	<b>064 / 072</b>


Product group  
**1**

All dimensions in mm.

## Variation

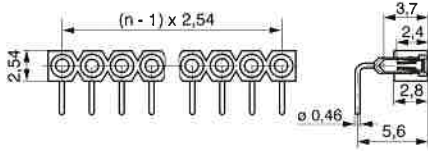

**1**

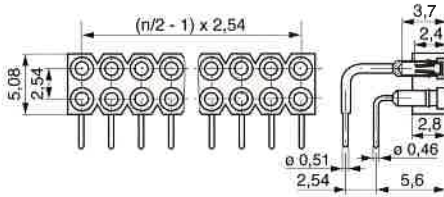

**2**

Clip style: S = 4 finger clip  
 Plating: T = Sn  
 F = Au  
 H = Au 0,75 μ

\* No. of contacts:  
 Variation 1 = 001 - 064  
 Variation 2 = 002 - 072

Variation (1,2)

No. of contacts \*  
 (001, ... - 072)

Clip style  
 Plating contact  
 Plating clip (F,H)



www.mpe-connector.de

Order code:

009 - - - D - X0ST - XS0

Mating series	034	038	035	037	367
see page	2-4	2-6	2-7	2-8	2-9