


Shrink DIP Socket and Socketstrip 1,778 mm

Series

012

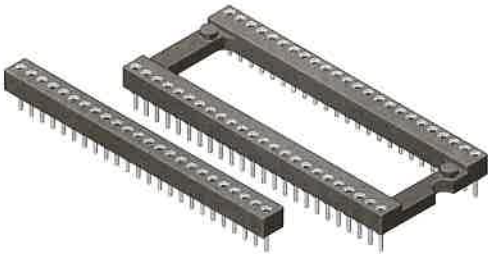

Rated current	3,0 A
Rated voltage	150 V _{RMS} / V _{DC}
Withstand voltage	1000 V _{RMS} for one minute
Material contact	Copper alloy
Material clip	BeCu
Material insulator	High temp. thermoplast UL94V-0
Operating temperature	-55°C to +125°C
Max. soldering temper.	260°C for 10 seconds


pitch	1,778
termination	
mating pin size	∅ 0,40-0,56 □ 0,25x0,45
max. pincount	038 / 068

Product group
1

All dimensions in mm.



Variation

Contact type



1


A5

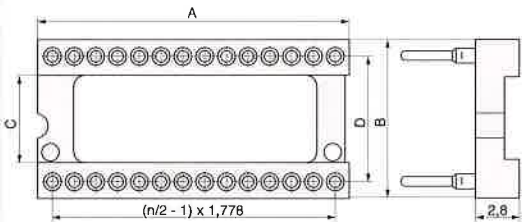

2

	no. of contacts	row distance (code)	row distance (mm)	see figure left	see figure left	see figure left	available in variation
	n	D	A	B	C		
016	3	7,62	14,60	10,10	4,40	2	
020	6	15,24	18,10	17,64	10,25	2	
024	6	15,24	21,70	17,64	10,25	2	
028	4	10,16	25,20	12,70	6,20	2	
028	6	15,24	25,20	17,64	10,25	2	
030	4	10,16	27,00	12,70	6,20	2	
032	4	10,16	28,80	12,70	6,20	2	
040	6	15,24	35,80	17,64	10,25	2	
042	6	15,24	37,70	17,64	10,25	2	
048	4	10,16	43,10	12,70	6,20	2	
048	6	15,24	43,10	17,64	10,25	2	
052	6	15,24	46,70	17,64	10,25	2	
056	6	15,24	50,20	17,64	10,25	2	
064	6	15,24	57,30	17,64	10,25	2	
068	6	15,24	60,90	17,64	10,25	2	
064	7	19,05	57,30	21,50	14,25	2	

Clip style: S = 4 finger clip
 Plating: T = Sn, F = Au, H = Au 0,75 μ

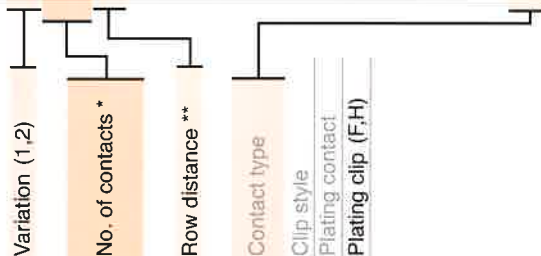

For variation 1 please fill
 * No. of pins 002 - 038
 ** Row distance = 0



www.mpe-connector.de

Order code:

012 - - - - A5ST - XS0