

Precision Contact on Brass Carrier 2,54 mm

Series **074**





Rated current	3,0 A
Rated voltage	150 VRMS / Vdc
Withstand voltage	1000 VRMS for one minute
Material contact	Copper alloy
Material clip	BeCu
Operating temperature	-55°C to +125°C
Max. soldering temper.	260°C for 10 seconds

pitch	2,54
termination	
mating pin size	ø 0,40-0,56 □ 0,25x0,45
max. pincount	064 / 040



Product group **1**

All dimensions in mm.

Variation

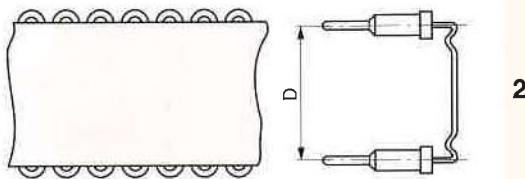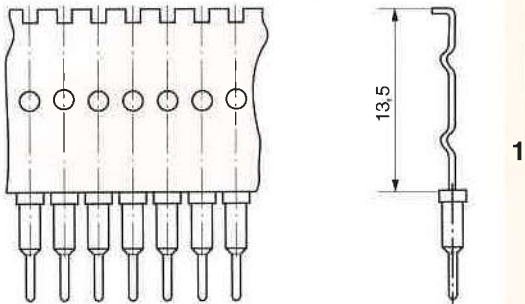

Contact type



no. of contacts	row distance (code)	row distance (mm)	available in variation
n		D	
006	3	7,62	2
008	3	7,62	2
014	3	7,62	2
016	3	7,62	2
018	3	7,62	2
020	3	7,62	2
024	6	15,20	2
028	6	15,20	2
032	6	15,20	2
040	6	15,20	2

Clip style: S = 4 finger clip
 Plating: T = Sn
 F = Au
 H = Au 0,75 µ

