


# Precision Contact on Carrier Tape 2,54 mm

Series **080**

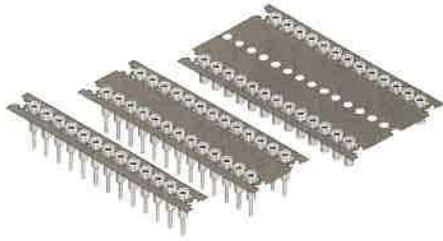


Rated current	3,0 A
Rated voltage	150 V <sub>RMS</sub> / V <sub>DC</sub>
Withstand voltage	1000 V <sub>RMS</sub> for one minute
Material contact	Copper alloy
Material clip	BeCu
Operating temperature	-55°C to +125°C
Max. soldering temper.	260°C for 10 seconds

pitch	<b>2,54</b>
termination	
mating pin size	ø 0,40-0,56
	□ 0,25x0,45
max. pincount	<b>10K / 20K</b>


Product group **1**

All dimensions in mm.

## Variation




1

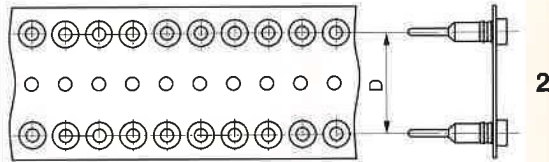


2

## Contact type



C7




C8

no. of contacts	row distance (code)	row distance (mm)	available in variation
n		D	
100	0		1
01K <sub>(1000)</sub>	0		1
10K <sub>(10000)</sub>	0		1
020	3	7,62	2
200	3	7,62	2
200	6	15,24	2
02K <sub>(2000)</sub>	3	7,62	2
02K <sub>(2000)</sub>	6	15,24	2
20K <sub>(20000)</sub>	6	15,24	2
Custom			

Clip style:  
S = 4 finger clip

Plating:  
T = Sn  
F = Au  
G = Au 0,25 µ  
H = Au 0,75 µ

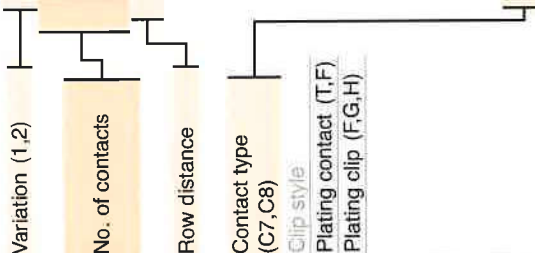

www.mpe-connector.de

Order code:

080 - - - - S - ZS0

Mating series	033	034	038	035	037	367
see page	2-2	2-4	2-6	2-7	2-8	2-9