


Precision Display Socket Strip 2,54 mm

Series

220

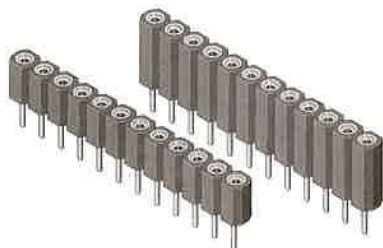


Rated current	3,0 A
Rated voltage	150 VRMS / VDC
Withstand voltage	1000 VRMS for one minute
Material contact	Copper alloy
Material clip	BeCu
Material insulator	High temp. thermoplast UL94V-0
Operating temperature	-55°C to +125°C
Max. soldering temper.	260°C for 10 seconds


pitch	2,54
termination	
mating pin size	ø 0,40-0,56 □ 0,25x0,45
max. pincount	032 / 050

All dimensions in mm.

Variation




1



2


Contact type

A7




(6 finger clip on request)


B1



K1



K7



(6 finger clip on request)

contact type

B1
K1
A7
K7

available in variation

1
1
2
2

Clip style: S = 4 finger clip
(6 finger clip on request)
Plating: T = Sn
F = Au

* No. of contacts:
Variation 1 = 001 - 032
Variation 2 = 001 - 050

Variation (1,2)

No. of contacts *
(001, ... - 050)

Contact type
(A7, B1, ...)

Clip style

Plating contact

Plating clips



www.mpe-connector.de

Order code:

220 - - - - D - STF - XS0

Mating series	034	038	035	037	367
see page	2-4	2-6	2-7	2-8	2-9

Product group
1

Contact Type

Product group
1


A5		C5		F4	
A7		C7		F5	
B1		C8		F6	
B2		D1		F7	
B3		D2		F9	
C1		F1			
C3		F2			
C4		F3			



www.mpe-connector.de

MPE-Garry GmbH • Schäfflerstraße 13 • 87629 Füssen • Germany • Phone: +49 (0) 83 62 / 91 56-0 • Fax: +49 (0) 83 62 / 91 56-500 • Email: vk@mpe-connector.de • www.mpe-connector.de

Contact Type

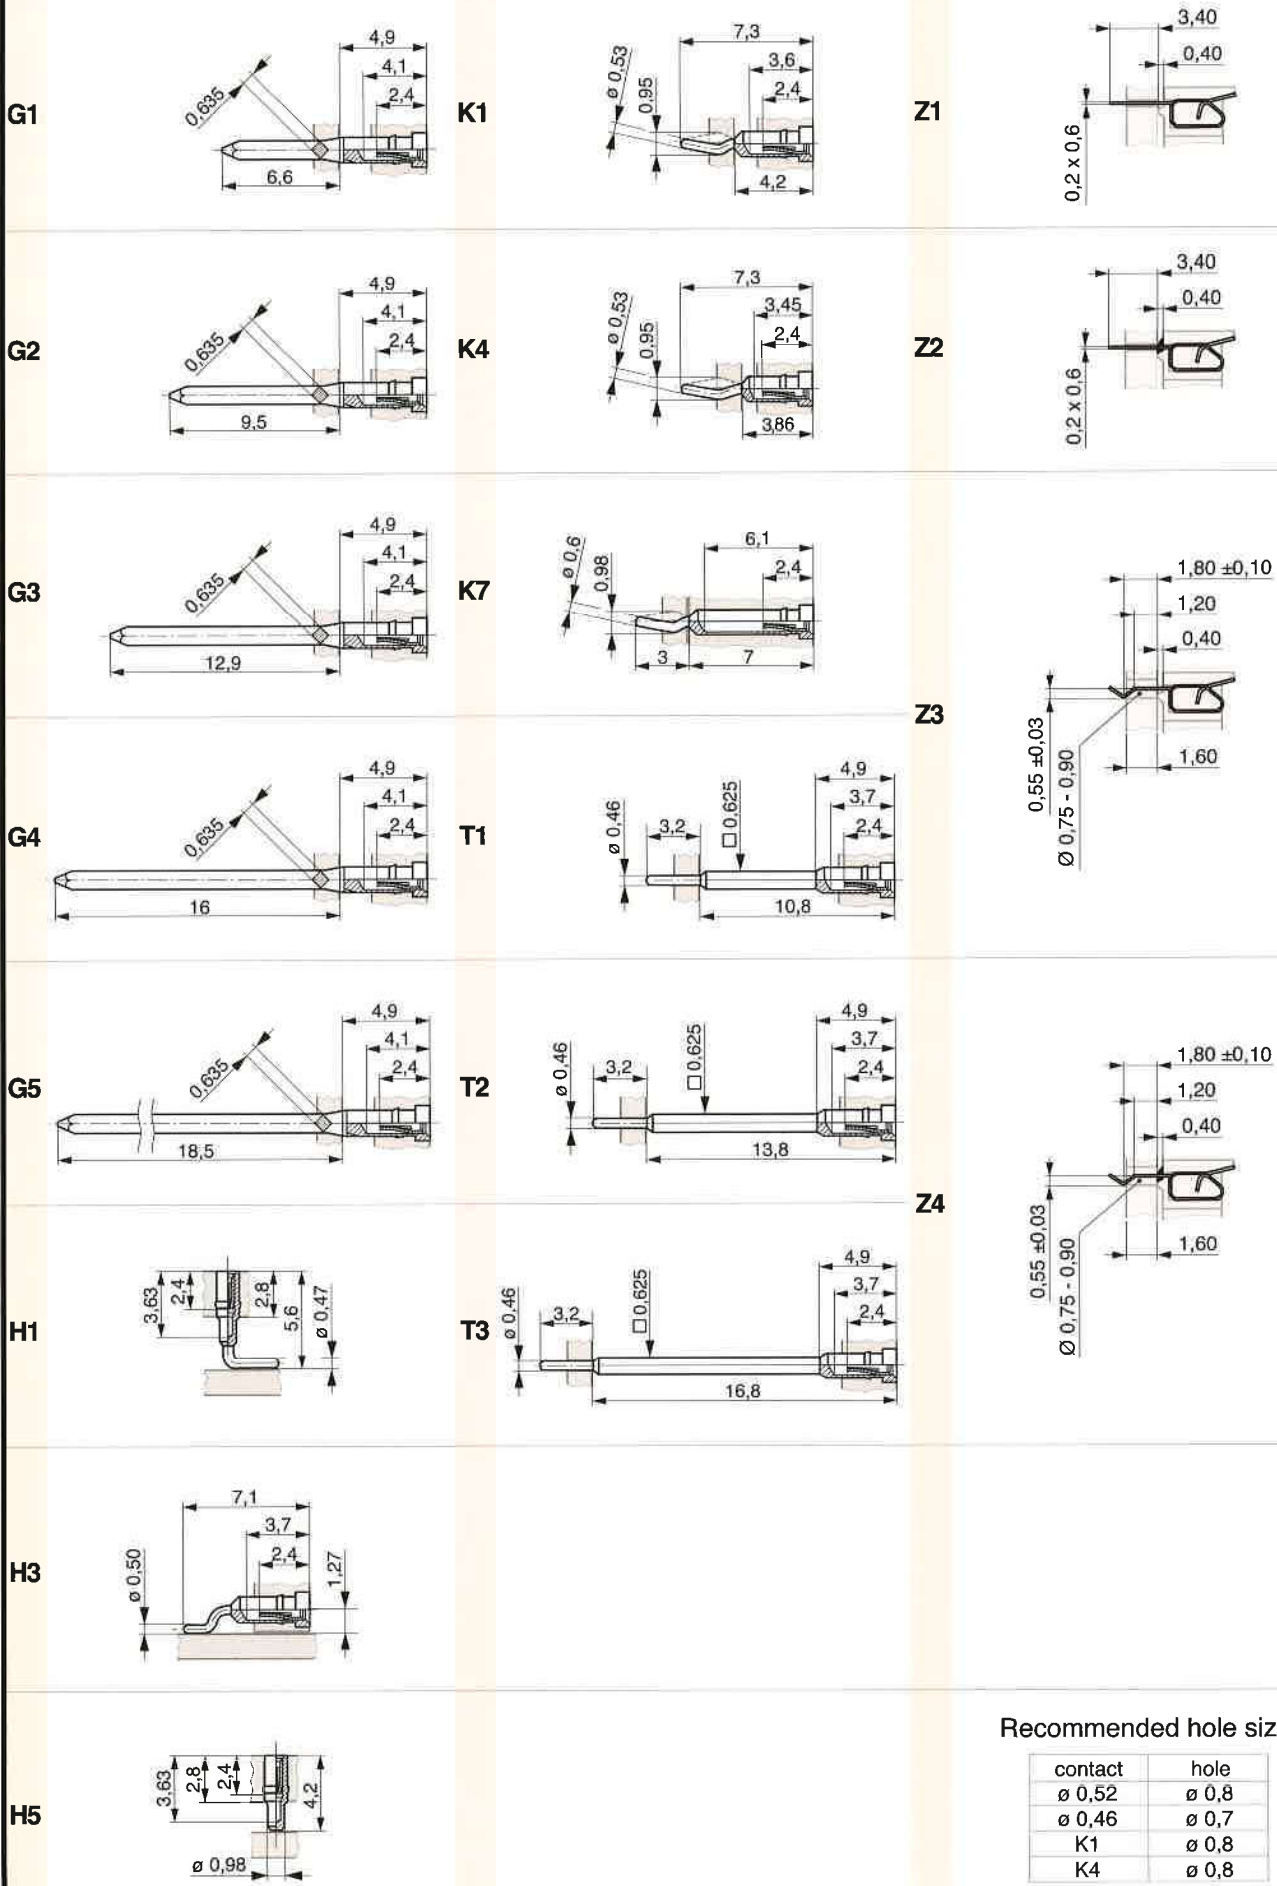

Recommended hole size:

contact	hole
ø 0,52	ø 0,8
ø 0,46	ø 0,7
K1	ø 0,8
K4	ø 0,8